



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01Q 9/36, 1/36	A1	(11) International Publication Number: WO 98/43313 (43) International Publication Date: 1 October 1998 (01.10.98)
(21) International Application Number: PCT/GB98/00680 (22) International Filing Date: 20 March 1998 (20.03.98) (30) Priority Data: 9705777.2 20 March 1997 (20.03.97) GB (71)(72) Applicants and Inventors: GANESHMOORTHY, David [GB/GB]; 2 Queens Court, 25 Earls Court Square, London SW5 9BA (GB). GANESHMOORTHY, Kandiah [GB/GB]; 2 Queens Court, 25 Earls Court Square, London SW5 9BA (GB). GANESHMOORTHY, Richard [GB/GB]; 2 Queens Court, 25 Earls Court Square, London SW5 9BA (GB). (74) Agent: ROCK, Olaf, Colin; Rock and Company, Trelawn, Cassington, Witney, Oxford OX8 1DN (GB).		(81) Designated States: CN, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: COMMUNICATION ANTENNA AND EQUIPMENT (57) Abstract <p>A communication antenna (10) having a driven element (16) extending between a feed point (13) and an attachment point (15) to a top loaded element in which the driven element (16) is longer than the shortest distance (P) between the feed point (13) and the attachment point (15), the driven element (16) being configured to follow a meandering path between the feed point (13) and the attachment point (15). The driven element (16) is at least in part in the form of straight sections joined to give a zigzag configuration (16). Alternatively the driven element (16) is at least in part in the form of curved sections. At least a pair of parasitic elements (18, 19) can be provided with the members of the pair (18, 19) being disposed on opposite sides of, and off-set from, the driven element (16) and parallel to a straight line (P) linking the feed point (13) to the attachment point (15); the parasitic elements (18, 19) serving to provide impedance matching and increased bandwidth and providing shielding against radiation from the antenna in a predetermined direction. Typically passive elements can be incorporated with the parasitic elements (18, 19) to provide for the overall reduction in the size of the antenna (10).</p> <div data-bbox="828 1155 1347 1848"> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

COMMUNICATION ANTENNA AND EQUIPMENT

TECHNICAL FIELD

This invention relates to a communication antenna and in particular it is concerned with a communication antenna for a mobile phone.

BACKGROUND ART

Known antenna for a mobile phone consist of a helix with or without a radiating straight element. The helix serves to provide for radial radiation/reception. However some energy is lost as circular polarised radiation along the axis of the 'helicoil' section.

DISCLOSURE OF INVENTION

According to a first aspect of the present invention there is provided a communication antenna having a driven element extending between a feed point and an attachment point to a top loaded element characterised in that the driven element is longer than the distance between the feed point and the attachment point.

According to a first preferred version of the first aspect of the present invention the driven element is configured to follow a meandering path between the feed point and the attachment point.

According to a second preferred version of the first aspect of the present invention or the first preferred version thereof the driven element is at least in part in the form of straight sections joined to give a zigzag configuration.

According to a third preferred version of the first aspect present invention or the first preferred version thereof the driven element is at least in part in the form of curved sections.

According to a fourth preferred version of the first aspect of the present invention or any preceding preferred version thereof the driven element is of a predetermined

length relating to operating frequency band and return loss requirements.

According to a fifth preferred version of the first aspect of the present invention or any preceding preferred version thereof the antenna is equipped with at least a pair of parasitic elements the members of the pair being disposed on either side or on opposite sides of, and off-set from, the driven element and parallel or slant to a straight line linking the feed point to the attachment point; the parasitic elements serving to provide impedance matching and increased bandwidth and providing shielding against radiation from the antenna in a predetermined direction. Typically passive elements are incorporated parasitic elements to provide for an overall reduction in the size of the antenna.

According to a second aspect of the present invention there is provided a mobile phone incorporating an antenna according to the first aspect or any preferred version thereof.

According to a first preferred version of the second aspect of the present invention the antenna is formed as a printed circuit board or is deposited on a laminar member having a structural function for at least a part of the phone.

According to a second preferred version of the second aspect of the present invention or the first preferred version thereof the parasitic elements are disposed relative to the driven element to provide increased bandwidth and shielding against radiation from the antenna in a predetermined direction such as towards a user of the phone or at least towards the nearest part of a user of the phone.

BRIEF DESCRIPTION OF DRAWINGS

An exemplary embodiment of the invention will now be described with reference to the accompanying diagrammatic drawings of an antenna of which:

Figure 1 is a front elevation; and

Figure 2 is a rear elevation.

MODE FOR CARRYING OUT THE INVENTION

Figure 1 shows an antenna 10 on a circuit board 11 located relative to a ground plane 12 which serves to locate a feed point 13. Figure 1 shows side A of the circuit board 11 on which is deposited as an etched copper conductor:

top loading element 14 providing an attachment point 15; and
driven element 16 extending from feed point 13 to attachment point 15.

A straight path P extends from feed point 13 to attachment point 15. The driven element 16 follows a meandering path about path P. The length defined by the central locus of the meandering driven element 16 is longer than that of the path P. As shown in the drawings the driven element 16 is for most of its length in the form of a zigzag. In an alternative version the meandering path can be in the form of curved elements rather than angular ones. In other versions the driven element can be made up of a mixture of shapes so long as its overall length is greater than that of path length P. The actual length of the driven element 16 is determined by the frequency at which the antenna is to be operated and any return loss requirements.

Figure 2 shows side B on the opposite side of the circuit board 11 to side A described in connection with Figure 1. Side B serves to locate a pair of copper parasite elements 18, 19 which are symmetrically disposed about path P and driven element 16. The parasite elements 18, 19 serve in dynamic combination with the driven element 16 to provide the required impedance match and broad band operating characteristics. In addition the parasite elements serve to limit radiation from the rear side of the driven element 16 which can be used to shield the nearest part of the body of a user of a mobile phone equipped with the antenna 10.

INDUSTRIAL APPLICABILITY

The configuration of the antenna of the present invention lends itself to provide an efficient unit of small overall size which is of particular benefit for a mobile phone. It can be made to fit an even smaller envelope by incorporating a passive component serving to provide a loading while maintaining transmitting/receiving efficiency.

It has been found by trial that in terms of electrical performance the antenna of the present invention has a broader bandwidth and optimum impedance match than current designs. Although the proposed aerial is physically shorter than a $1/4$ wavelength whip it provides greater efficiency when compared with such a whip over a full frequency band width of 880 – 2000 MHz.

The antenna of the present invention provides full performance at all times unlike retractable antenna whose optimum performance requires the antenna to be in its extended rather than its retracted position.

The invention also envisages a mobile phone equipped with the proposed antenna. The antenna for this purpose can be embodied in a number of ways such as a printed circuit board as described in the exemplary embodiment, encapsulated between plastic skins or etched onto a plastic skin. Typically the antenna is incorporated in a hinged (flip top) lid to a body section of a mobile phone. Speaker and microphone are incorporated in the body section. The proposed parasite elements serve to provide shielding between the antenna and the side of the head of the user when pressed to the body section. Additional shielding may also be provided. The overall effect is to provide that energy that would otherwise be absorbed by the head of the user is re-directed giving an energy gain.

CLAIMS

- 1 A communication antenna having a driven element extending between a feed point and an attachment point to a top loaded element characterised in that the driven element (16) is longer than the distance (P) between the feed point (13) and the attachment point (15).
- 2 A communication antenna as claimed in Claim 1 wherein the driven element (16) is configured to follow a meandering path between the feed point (13) and the attachment point (15).
- 3 A communication antenna as claimed in Claim 1 or Claim 2 wherein the driven element (16) is at least in part in the form of straight sections joined to give a zigzag configuration (16, Figure 1).
- 4 A communication antenna as claimed in Claim 1 or Claim 2 wherein the driven element (16) is at least in part in the form of curved sections.
- 5 A communication antenna as claimed in any preceding claim wherein the driven element (16) is of a predetermined length relating to operating frequency band and return loss requirements.
- 6 A communication antenna as claimed in any preceding claim equipped with at least a pair of parasitic elements (18, 19 Figure 2) the members of the pair being disposed on opposite sides of, and off-set from, the driven element (16) and parallel to a straight line (P) linking the feed point (13) to the attachment point (15); the parasitic elements (18, 19) serving to provide impedance matching and increased bandwidth and providing shielding against radiation from the antenna (10) in a predetermined direction.
- 7 A communication antenna as claimed in Claim 6 characterised in that passive elements are incorporated with the parasitic elements (18, 19) to provide for the overall reduction in the overall size of the antenna (10).

- 8 A mobile phone characterised by an antenna (10) as claimed in any preceding claim.
- 9 A mobile phone as claimed in Claim 8 characterised in that the antenna (10) is formed as a printed circuit board (11) or is deposited on a laminar member having a structural function for at least a part of the phone.
- 10 A mobile phone incorporating an antenna as claimed in Claim 8 characterised in that the parasitic elements (18, 19) are disposed relative to the driven element (16) to provide increased bandwidth and shielding against radiation from the antenna (10) in a predetermined direction from the phone.

1/1

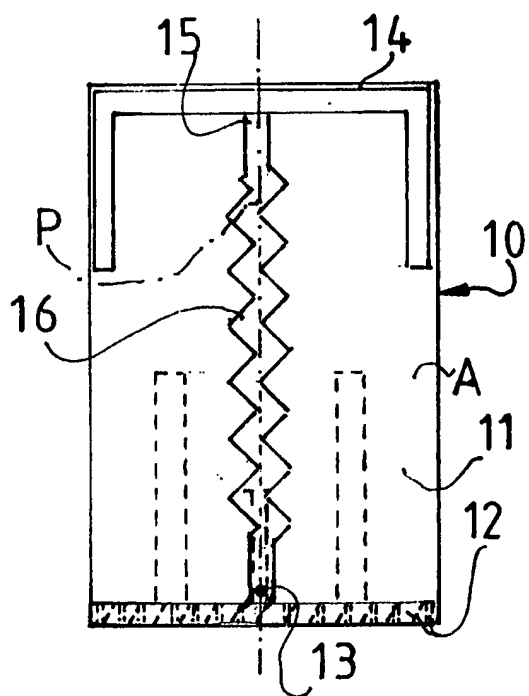


Fig 1

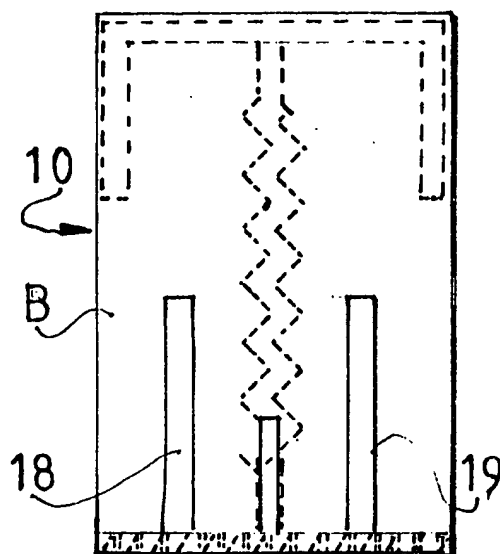


Fig 2

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/00680

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H01Q9/36 H01Q1/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 649 181 A (ALCATEL MOBILE COMM FRANCE) 19 April 1995	1,5-8,10
Y	see column 3, line 41 - column 11, line 10; figures 1,3-14	2-4,9
Y	PATENT ABSTRACTS OF JAPAN vol. 018, no. 447 (E-1594), 19 August 1994 & JP 06 140820 A (SANSEI DENKI KK), 20 May 1994, see abstract	2-4,9
X	EP 0 528 775 A (ERICSSON GE MOBILE COMMUNICAT) 24 February 1993 see page 2, line 8 - page 3, line 29; figure 1	1,5,8

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

13 July 1998

Date of mailing of the international search report

23/07/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Cannard, J-M

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/00680

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 635 898 A (ERICSSON GE MOBILE COMMUNICAT) 25 January 1995 see page 3, line 22 - page 4, line 34; figures 1,2	1,8
A	MORGAN M A ET AL: "EIGENMODE ANALYSIS OF DIELECTRIC LOADED TOP-HAT MONOPOLE ANTENNAS" IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, vol. 42, no. 1, 1 January 1994, pages 54-61, XP000434716 the whole document	1
A	KOICHI OGAWA ET AL: "A DIVERSITY ANTENNA FOR VERY SMALL 700-MHZ BAND PORTABLE TELEPHONES" IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, vol. 42, no. 9, September 1994, pages 1342-1345, XP000466904 the whole document	1
A	NAKANO H ET AL: "SHORTENING RATIOS OF MODIFIED DIPOLE ANTENNAS" IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, vol. 32, no. 4, 1 April 1984, page 385/386 XP002011484 the whole document	1-4
A	US 4 101 898 A (INGRAM DAVID LEE) 18 July 1978 see column 2, line 16 - column 3, line 65; figures 1-3	1,8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/00680

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0649181 A	19-04-1995	FR 2711277 A	21-04-1995
		AU 683907 B	27-11-1997
		AU 7291794 A	04-05-1995
		CA 2118082 A	15-04-1995
		FI 944798 A	15-04-1995
		JP 7176929 A	14-07-1995
		NZ 264417 A	28-10-1996
		US 5668559 A	16-09-1997
EP 0528775 A	24-02-1993	SE 468917 B	05-04-1993
		AT 142822 T	15-09-1996
		AU 649866 B	02-06-1994
		AU 2101192 A	18-02-1993
		CA 2074015 A	17-02-1993
		DE 69213621 D	17-10-1996
		DE 69213621 T	06-02-1997
		FI 923614 A	17-02-1993
		JP 5206715 A	13-08-1993
		MX 9204664 A	01-02-1993
		SE 9102379 A	17-02-1993
		US 5592184 A	07-01-1997
EP 0635898 A	25-01-1995	CN 1102509 A	10-05-1995
		FI 943339 A	15-01-1995
		JP 7154121 A	16-06-1995
		SE 9302420 A	15-01-1995
US 4101898 A	18-07-1978	NONE	